



PHILLIP JEFFRIES LTD. HANGING INSTRUCTIONS

TRELLIS EMBROIDERY WALLCOVERING

STOP: DO NOT CUT OR INSTALL UNTIL YOU HAVE READ THESE INSTRUCTIONS!

Thank you for choosing this fine hand crafted wallcovering. For the best results, we believe that a professional wallcovering installer should hang these wallcoverings.

DESCRIPTION:

Elegant and timeless, our **TRELLIS EMBROIDERY** is a continuous pattern of 8.7" diamonds embroidered atop our textured Manila hemp ground. The embroidered surface is then backed a 2nd time for ease of installation - as it avoids the penetration of paste through embroidery holes. Touting a stain repellent finish, this collection is available in three colorations with coordinating textures, all in stock for immediate delivery.

PREPARATION:

Before you cut and hang, please be sure you have:

1. The correct wallcovering and the correct amount of wallcovering to finish the job.
2. Inspect the wallcovering carefully to ensure it is free of defects. Please note that the Manila Hemp wallcovering is a handmade product and woven of natural fibers that feature subtle variations in color and texture. This are characteristics of natural textured wallcovering and should not be considered defects.

If no defect is evident before installation, the material should be inspected after three (3) strips are installed. If any defect is evident at this time (or at any point in the installation) no additional material should be hung until Phillip Jeffries Ltd. is notified. **NO CLAIMS WILL BE ALLOWED FOR MORE THAN (3) STRIPS ON THE WALL.** All claims must be made within 60 days of the invoice date. No labor claims will be allowed at any time.

BUILDING & MATERIAL CONDITIONS: The building must be weather-tight with HVAC settings (including pressure, temperature and relative humidity) the same as those of an occupied building for three days prior to, throughout installation and three days after installation. The walls must be structurally sound including elimination of sources of moisture accumulation into the wall or wall cavity. The wallcovering must be in a clean and dry condition and must be stored at normal occupied building temperature and humidity for at least three days prior to installation. All adhesives and primers must be new, good quality, commercial grade materials, which have not been contaminated.

IF YOU HAVE ANY QUESTIONS, PLEASE STOP AND CONTACT
PHILLIP JEFFRIES LTD. BEFORE PROCEEDING.

WALL PREPARATION:

1. The walls to be covered must be properly prepared to insure that the wallpaper will adhere to the wall surface. Even the strongest adhesive can only work when the wall surface is clean and properly prepared.
2. Phillip Jeffries recommends that installers use a hard, acrylic, pigmented, wall-protecting primer that is **SPECIFICALLY** made for WALLCOVERING INSTALLATION and WALL PROTECTION.

DO NOT utilize R-35 on its own as a primer as R-35 is a light-duty adhesion promoting sizer, not a wall-protecting, wallcovering primer.

3. Allow the primer to dry thoroughly before hanging.

311 Route 46 Fairfield, NJ 07004
Phone: 800-576-5455 Fax: 888-759-8878
Email: customerservice@phillipjeffries.com



PHILLIP JEFFRIES LTD. HANGING INSTRUCTIONS

TRELLIS EMBROIDERY WALLCOVERINGS

STOP: DO NOT CUT OR INSTALL UNTIL YOU HAVE READ THESE INSTRUCTIONS!

INSTALLATION

TRIMMING


1. The edges are untrimmed and will require cutting a precision edge on your work table.
2. Trimmed width is 34" (86.36 CM.)
3. **For the Left side of Each Strip:** Trim to the inside edge of the diamond pattern (see Diagram A)
4. **For Right side of Each Strip:** Trim to the outside edge of diamond pattern (see Diagram B)
5. Trim edges with a VERY sharp razor blade. Change your blades often.

ADHESIVE

1. We recommend a clear, pre-mixed vinyl adhesive.
2. Apply the paste to the back of the paper, which will become flexible and easy to hang. Allow the paste to become tacky prior to hanging (exact time will vary based on temperature, humidity, etc.)
3. Do not add excessive water to the paste as it may cause the backing paper to pull away from the front.
4. It is important to keep the face of the wallcovering free of adhesive.

MATCHING

1. Seams should be butted together to create a straight match.
2. Repeat is 8.7" (22.2 CM.)
3. Trimmed width is 34" (86.36 CM.) Trim to the right outside edge of diamond on both left and right sides of wallcovering strips.
4. During our test hang, paperhanger reversed the strips, to create the best match possible.

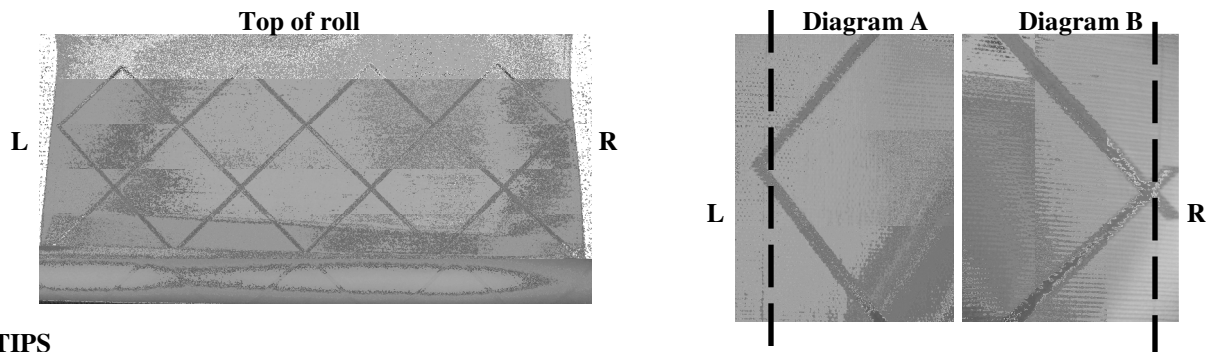

TIPS

1. Use a soft brush or plastic smoother when hanging, so that you do not damage the face of the wallcovering.
2. DO NOT allow paste or excessive water to stain the front of the wallcovering. Both paste and excessive water will change the color of the embroidery and the face of the wallcovering's natural texture.
3. Paste, trim and hang one strip at a time.
4. Do not use a seam roller.
5. This wallcovering has been treated with a stain repellent finish to allow the washing of stains. Treat stains as soon as possible with clean water, using a soft cloth. Try to use a lifting action, avoid hard rubbing of spots to prevent discoloration.
6. Subtle shading differences between strips tend to soften over time as the Trellis Embroidery begins to oxidize.

311 Route 46 Fairfield, NJ 07004
Phone: 800-576-5455 Fax: 888-759-8878
Email: customerservice@phillipjeffries.com